700 Hand-Held Power Drive Features

• Capacity: 1/8" - 2" (3 - 51 mm) pipe

• Weight: 25 lbs. (12 kg), Power Drive Only

• **Length:** 28¹/₄ in. (71.7 cm)

Motor: Universal 1/2 Hp, 230 or 115 volt, 50 – 60 Hz

• Switch: Heavy-duty double-throw switch

• Gear Head: All spur gear reduction. Spring loaded adapter pawl, hardened steel spindle gear.

Gear Housing: Cast aluminum • Spindle Speed: 32 rpm (No load)




Shown With Optional Case

Order Information

Catalog	Model		Shipping Wt.	
No.	No.	Description	lb.	kg
41935	700	115V 25-60Hz Only	31	14
41940	700	230V 25-60Hz Only	31	14

Accessories

Catalog	Model		Weight	
No.	No.	Description	lb.	kg
42600	770	Adapter for 00-R and 00-RB	33/8 2	
42605	771	Adapter for 0-R	33/8	2
42610	772	Adapter for 11-R	31/2	2
42615	773	Adapter for 111-R	3	1
42620	774	Square Drive Adapter - 15/16"	5¹/₄	2
42625	775	Support Arm for No. 700	11	5
42950	B-171-X	Metal Carrying Case for No. 700 and Accessories	29	13
10883	418	Oiler w/1Gal. Nu-Clear Thread Cutting Oil	17.7	7.7
41620	_	Gearhead Motor Grease	1	0.5
16703	425	1/8" - 21/2" TRISTAND Chain Vise	32	14.5
72037	460	1/8" - 6" TRISTAND Chain Vise	47	21.0
_	_	1/8" - 1" 00-R Die Heads, See RT Catalog	_	_
	_	1/4" - 1" 00-RB Die Heads, See RT Catalog	_	_
_	_	1/8" - 2" 11-R Die Heads, See RT Catalog	_	_
	_	¹/₅" - 2" 12-R Die Heads, See RT Catalog	_	_

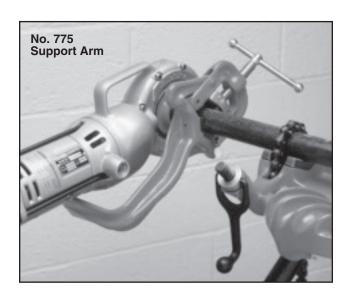

For the complete selection of the Ridge Tool product line, please refer to the Ridge Tool Catalog or www.RIDGID.com.



−Distributor————							