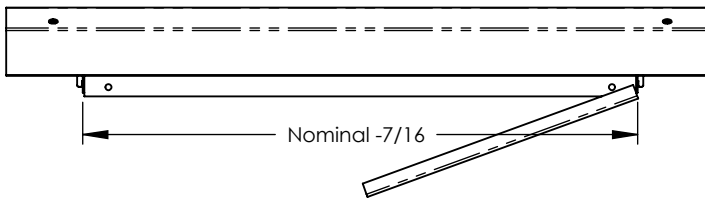


**USR-52 Series
 Single Deflection Spiral Duct
 Register**
Standard:

- Single deflection blades with Nylon bushings for easy adjustment
- Galvanized steel construction
- Open and closed die cut foam gasketing for tight seal with duct
- Blades run parallel to shortest dimension

Optional:

- Screwdriver operated Spiral Scoop Extractor 1/2 length (USR-52-SC)
- Screwdriver operated Full Length Scoop Extractor, 24" Maximum Length Scoop (USR-52-FS)
- Recessed screwdriver operated Opposed Blade Damper (USR-52-O)
- Soft white, driftwood tan and designer colors available upon request


Shown with Scoop (SC)


Sizes Offered Widths	Lengths								
	10	12	14	16	18	20	24	30	36
3	6"/24"	6"/24"	6"/24"	6"/24"	6"/24"	6"/24"	6"/24"	6"/24"	6"/24"
4	10"/24"	10"/24"	10"/24"	10"/24"	10"/24"	10"/24"	10"/24"	10"/24"	10"/24"
6	12"/24"	12"/24"	12"/24"	12"/24"	12"/24"	12"/24"	12"/24"	12"/24"	12"/24"
8	x	x	20"/36"	20"/36"	20"/36"	20"/36"	20"/36"	20"/36"	20"/36"
10	x	x	x	x	30"/48"	30"/48"	30"/48"	30"/48"	30"/48"
12	x	x	x	x	42"/48"	42"/48"	42"/48"	42"/48"	42"/48"

Table shows applicable pipe diameters

PROJECT
LOCATION
ENGINEER
ARCHITECT
CONTRACTOR

SUBMITTAL REVIEW