

## **SERVICE PARTS LIST**

BULLETIN NO. 54-40-6576

SPECIFY CATALOG NO. AND SERIAL NO. WHEN ORDERING PARTS

## **SLIDING COMPOUND MITER SAW**

CATALOG NO. 6496 / 6497

STARTING SERIAL NO.

882B


REVISED BULLETIN 54-40-6575

DATE July 2004

WIRING INSTRUCTION **58-01-1350** 

**★=Part number change** from previous service parts list.



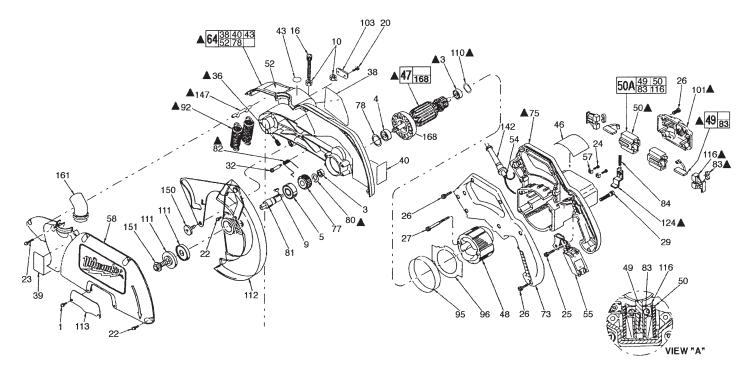

FIC	PART NO.	DESCRIPTION OF BART	IO DEO	FIC	PART NO.	DESCRIPTION OF PART	NO. REQ.
FIG. ★ 1	06-82-5560	<b>DESCRIPTION OF PART</b> 10-24 x 1/2 Pan Hd. Slt. Taptite T-25	10. REQ.	<b>FIG.</b> 64	28-14-2275	DESCRIPTION OF PART Upper Guard / Gear Case Assembly	
3	02-04-0845	8 x 22 x 7 Ball Bearing	(2)	73	31-44-1725	Handle Half	(1)
-	02-04-0645	· ·	(2)	± 75	31-44-1725		(1)
4		12 x 32 x 10 Ball Bearing	(1)	77		Motor Housing Gear	(1)
5 9	02-04-2040 06-42-2400	20 x 47 x 14 Ball Bearing Woodruff Key	(1)		32-75-3350 34-40-1375		(1)
		3/8-16 Hex Nut	(1)	78	34-40-1375	1-1/4 Dia. O-Ring	(1)
10 16	06-55-2500		(2)	80		Retaining Ring	(1)
_	06-75-4697 06-82-5314	3/8-16 x 1-1/2 Cap Machine Screw	(1)	81	38-50-5840	Spindle	(1)
<b>*</b> 20		10-24 x 1/2 Pan Hd. Taptite T-25	(2)	82	40-50-1205	Lower Guard Return Spring	(1)
22	06-82-5411	10-24 x 5/8 Pan Hd. Slt. Taptite T-25	(8)	83	40-50-8160	Coil Spring	(2)
23	06-82-5574	10-24 x 7/8 Pan Hd. Slt. Taptite T-25	(1)	84	40-50-8170	Spring (Spindle Lock)	(1)
24	06-82-7212	4-20 x 1/4 Pan Hd. Plastite T-10	(2)	92	40-50-8680	Return Spring	(2)
25	06-82-7226	6-19 x 5/16 Pan Hd. Plastite T-15	(1)	95	42-14-0350	Baffle	(1)
26	06-82-7270	8-16 x 5/8 Pan Hd. Slt. Plastite T-20	(12)	96	42-14-0355	Baffle	(1)
27	06-82-7453	8-16 x 2-1/4 Pan Hd. Slt. Plastite T-20	(2)	99	42-50-0281	Cam Link	(1)
29	06-82-9024	10-24 x 1-3/4 Pan Hd. Slt. Tapt. Sems T-25		101	42-92-0890	End Cover	(1)
32	06-82-9690	Shoulder Screw	(1)	103	42-92-1070	Nut Retaining Cover	(1)
36	06-83-3150	5/16-18 x 1/2 Set Screw Hex Socket	(2)	<b>★</b> 110	45-88-0577	Wave Washer	(1)
38	10-15-0601	Trilingual Label	(1)	111	43-34-0720	Blade Flange	(2)
39	10-15-1510	Satisfaction Label	(1)	112		Lower Guard Assembly	(1)
40	10-15-9450	Warning Label	(1)	113	43-54-0740	Blade Screw Guard	(1)
43	10-20-1210	Warning (Rain) Label	(1)	116	43-72-0180	Spring Holder	(2)
46	12-20-0810	Service Nameplate Kit	(1)	124	44-10-0310	Locking Lever	(1)
47	16-70-0420	Armature	(1)	142	44-76-0210	Cord Protector	(1)
48	18-70-0420	Field	(1)	147	44-94-0410	Spring Hanger Rod	(1)
49	22-18-0387	Carbon Brush Assembly	(2)	150	45-04-0850	Shoulder Screw	(1)
50	22-20-0800	Brush Tube	(2)	151	45-04-0860	Blade Screw	(1)
50A	22-20-0802	Brush Tube Assembly	(2)	161	45-76-0331	Dust Tube	(1)
52	10-15-0615	Label - 3 step sliding motion	(1)	168	22-84-0850	Fan	(1)
54	22-64-3210	Cord	(1)				
55	23-66-2035	Switch	(1)				
57	23-74-1150	Terminal	(2)				
58	25-20-1331	Upper Guard Cover	(1)				


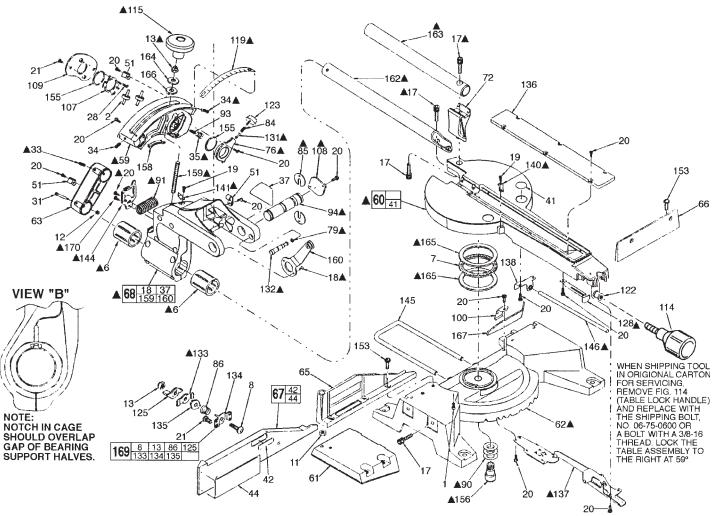


FIG.   PART NO.   DESCRIPTION OF PART   NO. REQ.   FIG.   PART NO.   DESCRIPTION OF PART   NO. REQ.   10-24 x 1/2 Pan Hd. Slt. Taptite T-25   (1)							20 8	
86 40-50-8610 Conical Spring (1) 90 40-50-8620 Belleville Spring (3) 91 40-50-8660 Bevel Overtravel Spring (1) 93 40-50-8710 Auxiliary Bearing Spring (1) 94 42-12-0170 Axle (1) 100 42-70-5141 Blade Wrench Clip (1)	* 1 2 6 7 8 11 12 137 18 19 20 21 21 22 21 22 21 22 22 23 23 24 24 24 25 26 26 26 26 26 26 26 26 26 26 26 26 26	06-82-5560 02-80-6100 02-40-1060 02-80-0130 06-10-1153 06-55-2710 06-57-5045 06-81-3172 06-82-3792 06-82-5270 06-82-5314 06-82-5314 06-82-9680 06-83-6035 06-83-3125 06-1055 28-35-0040 28-35-0040 28-90-0271 28-90-0281 31-58-0200 34-40-3000 40-50-8170 40-50-8610 40-50-8610 40-50-8610 40-50-8610 40-50-8710 42-12-0170	10-24 x 1/2 Pan Hd. Slt. Taptite T-25 Bearing Shaft Assembly Linear Ball Bearing Needle Thrust Bearing 5/16-18 x 1-1/4 Carriage Bolt 7/16-14 Hex Nut 10-24 Locknut 5/16-18 Locknut 5/16-18 Locknut 5/16-18 x 1 Hex Drive Taptite Screw 8-32 x 3/8 Flat Hd. Taptite T-15 6-32 x 1/4 Pan Hd. Slt. Taptite T-25 1/4-20 x 1/2 Pan Hd. Slt. Taptite T-25 1/4-20 x 1/2 Pan Hd. Machine Screw 1/4 x 1-1/2 Cap Shoulder Screw 1/4-20 x 3/8 Hex Socket Set Screw 1/4-20 x 3/8 Hex Socket Set Screw 1/4-20 x 3/4 Hex Socket Set Screw 1/4-20 x 3/8 Hex Socket Set Screw 1/4-20 x	(1) (2) (1) (1) (1) (1) (2) (2) (1) (2) (2) (1) (2) (1) (2) (1) (1) (1) (1) (1) (1) (1) (1) (1) (1	107 108 109 114 ★115 119 122 123 125 128 131 132 133 134 135 136 137 140 141 144 145 146 153 ★155 158 159 160 162 163 164 165 169	42-92-1085 42-92-1090 42-92-1100 43-62-1052 14-34-0205 43-82-0150 43-84-0860 43-98-0610 44-10-0330 44-20-0255 44-60-1095 44-60-1410 44-66-6010 44-66-6010 44-66-6110 44-66-6110 44-66-6110 44-72-0110 44-72-0110 44-72-0110 44-72-0110 44-72-0110 44-72-0110 44-72-0110 44-72-0110 44-72-0110 44-72-0110 44-72-0110 44-72-0110 45-76-0450 45-88-8333 45-60-0611 45-76-0450 45-88-8805 49-96-6205 14-46-2060	Bearing Clamp Cover Axle Cover Torque Arm Cover Table Lock Handle Adj. Knob Assembly (Incl.06-55-1985 Nut) Bevel Angle Indicator Hex Insert Knob Fence Clamp Lever Detent Lock Traverse Pin Lock Pin Clamp Plate Mounting Plate Detent Ball Plate Assembly Locking Plate / Rod Guide Miter Scale Pointer Bevel Scale Pointer Guide Rod Extension Rod 5/16-18 x 7/8 Pan Hd. Taptite Sems T-30 Seal Kit Table Shaft Bearing Support Shim Bevel Clamping Stud Cam Roller Support Assembly Guide Tube Auxiliary Tube Vertical Adjustment Washer Thrust Washer Nylon Washer Blade Screw Wrench Clamp Mechanism Kit	(1) (1) (1) (1) (1)

FIG.	LUBRICATION A
59, 158	Place a light coat of Type "L" Grease, No. 50-08-4230, between Fig. 59 (Torque Arm) and Fig. 158 (Bearing Support Shim).
62, 156	Apply .12 oz. of Type "L" Grease, No. 50-08-4230, under the head of the Fig. 156 (Table Shaft Assembly).  Apply a thin film of type "L" grease, No. 50-08-4230, prior to assembly, to the O.D. of the Fig. 156 (Table Shaft Assembly) and to the I.D.of the center bore of the Fig. 62 (Base).
64	Place .50 oz. of Type "Y" Grease, No. 49-08-5270, in the pinion pocket of Fig. 64 (Upper-Guard / Gear Case Assembly).
68	Seal slot between halves of Fig. 68 (Bearing Support Assembly) with Type "B" Grease, No. 49-08-0600.
68, 94	Apply .06 oz. of Type "L" Grease, No. 50-08-4230, to the two .125 wide grooves of Fig. 94 (Axle). Apply a thin film of Type "L" Grease, No. 50-08-4230, to the O.D. of Fig.94 (Axle) - (Not between the two locating grooves), and to the I.D. of the two pivoting hubs of Fig. 68 (Bearing Support Assembly) prior to assembly.
79, 132	After assembling Fig. 79 (O-Ring) onto Fig. 132 (Lock Pin), apply a light coat of Type "L" Grease, No. 50-08-4230.
94, 108	Apply a dab of Type "L" Grease, No. 50-08-4230, to the cover end of Fig. 94 (Axle), Prior to assembly of Fig. 108 (Axle Cover).
133	Apply a thin film of Type "L" Grease, No. 50-08-4230, to both sides of Fig. 133 (Clamp Plate) prior to assembly.
165	Apply a thin film of Type "L" Grease, No. 50-08-4230, to both sides of Fig. 165 (Thrust Washers).
114, 158, 159	Apply a thin film of Type "L" Grease, No. 50-08-4230, to threads of Fig. 114 (Table Lock Handle) and Fig. 159 (Bevel Clamping Stud) and to Fig. 158 (Bearing Support Shim).
FIG.	NOTES: ▲
3	Seal of Fig. 3 (Ball Bearing) towards fan of Fig. 47 (Armature).
6	Assemble Fig. 6 (both Linear Ball Bearings) so that the notch in the end of the cage faces out and oriented top dead center. (See view "B" for tolerance of orientation).
6, 68, 162	To establish a zero clearance condition between Fig. 6 (Linear Bearing) and Fig. 162 (Guide Tube), apply red locking sealant to two threads of the two screws above the bearings and tighten, in Fig. 68 (Bearing Support Assembly), one at a time while rotating the Bearing Support Assembly, until resistance is felt, then back out screw (1/8 turn max.) until Bearing Support Assembly rotates freely.
13, 59, 68	To establish proper clearance between Fig. 68 (Bearing Support Assembly) and Fig. 59 (Torque Arm), tighten Fig. 13 (5/16 Locknut) while rotating the Bearing Support Assembly until uniform resistance is felt, then back out nut (1/4 turn max.) until Bearing Support Assembly rotates freely.
17	<b>IMPORTANT:</b> Apply red locking sealant and tighten Fig. 17, the outboard (rear most) screw first to 150 in./lbs. Apply blue locking sealant and tighten the forward screw to 80 in./lbs.
18	Apply blue locking sealant to two threads of Fig. 18 (Flat Head Screw) prior to assembly.
20, 144	Apply blue locking sealant to two threads of Fig. 20 (10-24 Pan Hd. Screws) prior to assembly. After seating screws, back both screws out (max. 1/8 turn) until Fig. 144 (Retainer) moves freely side to side.
33	Replace Fig. 33 (Set Screws) with new whenever servicing. Apply blue locking sealant to two threads prior to assembly.
34	Apply blue locking sealant to two threads of Fig. 34 (Set Screws) prior to setting the 0° and 45° bevel stops.
35	Apply blue locking sealant to two threads of Fig. 35 (Set Screw) prior to assembly.
	Check cutting motion for smooth operation of all moving parts.
	Check rotating table for smooth operation thru a range of 50° left to 58° right.
36, 108	WARNING: Only tighten Fig. 36 (5/16 Set Screws) after assembly of Fig. 108 (Axle Cover). Screw closest to Axle Cover is to be tightened first.
47	Rotation of Fig. 47 (Armature) is clockwise when viewed from commutator end of motor housing.
47, 75, 110	Place Fig. 110 (Wave Washer) into Fig. 75 (Motor Housing) prior to assembling onto Fig. 47 (Armature).
47, 124	Check Fig. 124 (Locking Lever) for smooth operation and easy engagement of spindle on Fig. 47 (Armature).
49, 101	Brush shunt to be positioned as shown in view "A", so as not to interfer with Fig.101 (End Cover) during assembly.
50, 116	Fig. 116 (Spring Holder) must be oriented in Fig. 50 (Brush Tube) such that the open end of the spring cavity is facing the shunt slot in Brush Tube.
58, 92, 147	Before removing Fig. 58 (Upper Guard Cover), unhook Fig. 92 (Return Springs) from Fig. 147.
60, 162	After assembly of Fig. 162 (Guide Tube) to Fig. 60 (Table), parallelism between Guide Tube and Table surface must be ± .15°.
64, 147	Insert short end of Fig. 147 (Spring Rod Hanger) into Fig. 64 (Upper Guard / Gearcase Assembly).

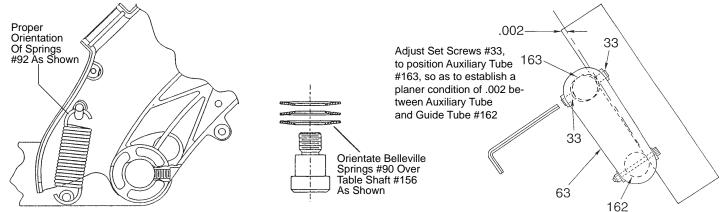

- 76, 131, 163 Insert Fig. 131 (Traverse Pin) into Fig. 76 (Traverse Lock) so that the end with the larger diameter will contact Fig. 163 (Auxiliary Tube) when assembled.
  - 80 Assemble Fig. 80 (Retaining Ring) with the concave bow of the ring toward the gear.
  - 82, 99 Insert bent leg of Fig. 82 (Spring) into small "L" shaped slot of Fig. 99 (Cam Link) prior to assembling Cam Link to Gear Case.

Check operation of Lower Guard mechanism:

- A. To verify that Lower Guard freely retracts and returns to start position, actuate saw as if making a cut.
- B. To verify that the Lower Guard Return Spring is functioning properly, retract Lower Guard by hand with saw head up. When released, the Guard should return to it's start position.

90°±30

- C. To verify Saw Head/Lower Guard Interlock, hold Lower Guard in retracted position and try to lower the Saw Head.
- 83, 116 Fig. 83 (Coil Spring) must be oriented in Fig. 116 (Spring Holder) such that the saddle of the Coil Spring is facing the open end of the Spring Holder.
- Relative orientation of Fig. 85 (Disc Springs) should be 180° apart Dimples to engage slots.
- 91, 144 Orientation of Fig. 91 (Bevel Overtravel Spring) and Fig. 144 (Overtravel Spring Retainer) should be as shown to the right, with end of coil positioned 90° ±30° to face of retainer.
- 92 Fig. 92 (Return Spring) orientation Lower hook of Return Spring to be open toward back of tool as shownabove.
- 119, 141 With Saw Head positioned at the 0° bevel stop, adjust Fig. 119 (Bevel Angle Indicator) so that the 0° mark aligns with Fig. 141 (Pointer). Then rotate Saw Head to the 45° stop and check to see that Pointer is aligned with the 45° mark.
  - To produce a quick disengaging action of Fig. 128 (Detent Lock), apply an outward force at the middle of the part so as to contact wall of Fig. 60 (Table Assembly), then secure.

OR

- 128, 137 Check operation of Fig. 137 (Detent Ball Plate Assembly) for positive locking and disengaging. Then check operation of Fig. 128 (Detent Lock).
  - 140 Check to see that Fig. 140 (Pointer) is lined up with the designated detent markings (45°, 30°, 22-1/2°, 15° and 0° in both directions).

Check angularity limits:

- A. Spindle mounting face to base to be 90° ± .22° at 0° bevel angle and 45° ± .22° at 45° bevel angle.
- B. Spindle mounting face to kerf plate pocket to be  $0^{\circ} \pm .50^{\circ}$ .
- C. Spindle mounting face to fence to be  $90^{\circ} \pm .10^{\circ}$ .
- Spherical end of Fig. 146 (Extension Rod) to be towards locking plate.

After securing fence, spindle axis should be positioned at least 1.920" horizontally from machined surface of fence and, at most, 4.563" vertically from machined surface of table, at 7/16" depth of cut.

- Apply blue locking sealant to two threads of Fig. 156 (Table Shaft) prior to assembly. Torque to 30 ft./lbs.
- 159 Apply blue locking sealant to two threads of Fig. 159 (Threaded Stud) prior to assembly.