



4700 W. 160th St.
Cleveland, OH 44135
PH:800-321-9532
FX:800-321-9535
www.oatey.com


TECHNICAL SPECIFICATION

**GALVANIZED BASE
NO-CALK®
ROOF FLASHINGS**



Engineering Specification: Oatey Galvanized Base No-Calk Roof Flashings can be used in commercial and residential applications where a watertight seal for roof penetrations around the plumbing vent pipe is required.

Job Reference

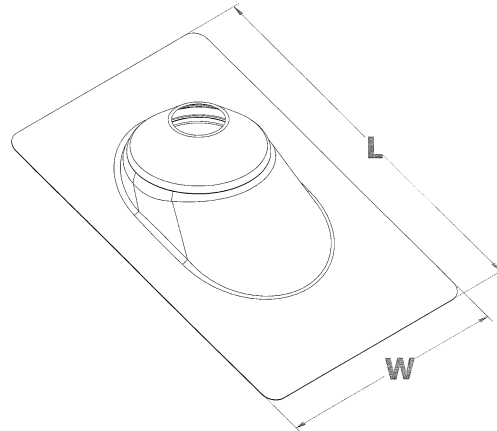

(All dimensions in

- ◆ Roof Flashing slides over DWV pipe for pitch to 40°
- ◆ Made of rust-proof, stamped 28 gauge galvanized steel
- ◆ Non-fading sealing collar
- ◆ Approved for Type B installations
- ◆ Not for hot-mopped or built-up roofs
- ◆ Do not use paint or petroleum based products on rubber collars

✓	Product No.	Description	Length (L)	Width (W)	PACK	CARTON WEIGHT
	11536	1.25"Galvanized ESM Flashing	12.5	8.75	25	27lbs.
	11549	1.5"Galvanized ESM Flashing	12.5	8.75	25	32lbs.
	11552	2" Galvanized ESM Flashing	14.5	10.75	25	28lbs.
	11565	2.5"Galvanized ESM Flashing	14.5	10.75	25	30lbs.
	11830	½" – 1" Galvanized No-Calk Roof Flashing – Solar	12-½	9	12	11 lbs.
	11831	½" – 1" Galvanized No-Calk Roof Flashing – Solar	18	18	12	23 lbs.
	11840	1-¼" – 1-½" Galvanized No-Calk Roof Flashing	12-½	9	12	12 lbs.
	11841	1-¼" – 1-½" Galvanized No-Calk Roof Flashing	12-½	9	6	6 lbs.
	11853	2" Galvanized No-Calk Roof Flashing	12-½	9	12	12 lbs.
	11854	2" Galvanized No-Calk Roof Flashing	12-½	9	6	7 lbs.
	11866	3" Galvanized No-Calk Roof Flashing	14-½	11	12	17 lbs.
	11867	3" Galvanized No-Calk Roof Flashing	14-½	11	6	9 lbs.
	11879	4" Galvanized No-Calk Roof Flashing	15	12	12	23 lbs.
	11880	4" Galvanized No-Calk Roof Flashing	15	12	6	12 lbs.
	11960	1-¼" – 1-½" Galvanized No-Calk Roof Flashing – 28 Gauge	14	14	12	23 lbs.
	11961	2" Galvanized No-Calk Roof Flashing – 28 Gauge	14	14	12	23 lbs.
	11921	1-¼" – 1-½" Large Base Galvanized No-Calk Roof Flashing	18	18	12	23 lbs.
	11934	2" Large Base Galvanized No-Calk Roof Flashing	18	18	12	23 lbs.
	11947	3" Large Base Galvanized No-Calk Roof Flashing	18	18	12	23 lbs.
	11950	4" Large Base Galvanized No-Calk Roof Flashing	18	18	12	26 lbs.
	11861	1,2,3" Galvanized No-Calk Roof Flashing	14.5	11	6	7lbs.
	11859	½" - 1" Galvanized Black 11" x 14.5" base	14.5	11	12	
	11923	1 ¼" – 1 ½" Galvanized 18" x18: base	18	18	6	
	11936	2" Galvanized 18" x 18" base	18	18	6	



IAPMO Listed



Data is subject to manufacturing tolerances.