# Little GIANT®

## VCL-24ULS SERIES







#### **Features**


- Vertical type pump unit
- Leakproof, rustproof, ABS tank
- ABS switch cover and pump stand
- 1/4" FNPT or 3/8" O.D. barbed discharge adapter
- Safety switch included on "S" models
- 24' shut-off head
- UL/CSA listed
- Thermal overload protected
- Motor 1/18 HP
- Intermittent Liquid Temp. up to 120°F


#### Construction

- Housing ABS
- Cover Galvanized steel
- Volute ABS
- Impeller Polypropylene
- Motor Shaft Stainless steel

Large, 1 gallon, ABS plastic tank condensate unit. Pumps feature a vertical-type pump with stainless steel motor shaft, and galvanized steel tank cover. Discharge is a 1/4" FNPT or 3/8" O.D. barbed tubing adapter. Pump features a safety switch that can be connected to shut down the air conditioner condenser or wired to an alarm to warn of possible tank overflow. Pump is rated for high-efficiency gas furnace applications that produce an acidic condensate. Thermally protected motor is UL and CSA listed.

# VCL-24ULS SERIES

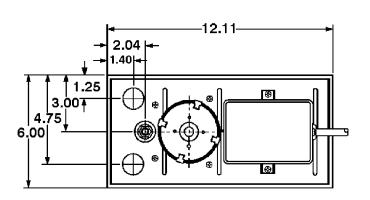




### **Specifications**

Model	Item	Discharge							Performance (GPH @ He			ead)	) Shut Off		Pwr. Cord	Weight
No.	No.	Size	Listing	HP	Volts	Hertz	Amps	Watts	1'	3'	5'	9'	Feet	PSI	(ft.)	(lbs.)
VCL-24UL	553206	1/4" FNPT x 3/8" OD Barbed	UL/CSA	1/18	115	60	2.5	148	270	260	250	210	24	10.4	6	8.20
VCL-24ULS	553201	1/4" FNPT x 3/8" OD Barbed	UL/CSA	1/18	115	60	2.5	148	270	260	250	210	24	10.4	6	8.20
VCL-24ULS*	14940371	1/4" FNPT x 3/8" OD Barbed	UL/CSA	1/18	115	60	2.5	148	270	260	250	210	24	10.4	6	9.25
VCL-24ULS	553211	1/4" FNPT x 3/8" OD Barbed	UL/CSA	1/18	230	50/60	1.2	148	270	260	250	210	24	10.4	6	8.20
VCL-24ULS*	14940372	1/4" FNPT x 3/8" OD Barbed	UL/CSA	1/18	230	50/60	1.2	148	270	260	250	210	24	10.4	6	9.25

<sup>\*</sup> With 3/8" ID X 20 ft. tubing

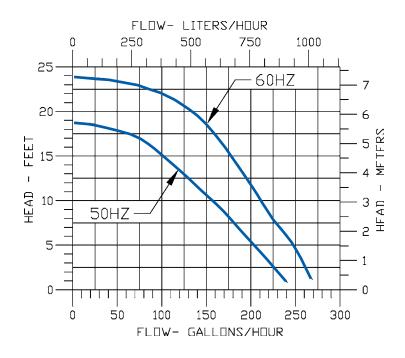

### **Replacement Parts**

Tank	153502
Cover, Tank	153220
Stand/Volute	153100
Cover, Volute	153110
Float/Switch Assy.	153537
Impeller	153131
Safety Switch Assy.	154713
Cover, Switch	153120
Adapter, 3/8"	153300
Seal Ring	924038

PO Box 12010 • Oklahoma City, OK 73157
Phone: 800.701.7894 • Fax: 800.701.8046
E-mail: customerservice@littlegiant.com