

Features _

- 60" x 42" x 20-1/4" Oval air massage bath
- Powerful, single-speed blower and air switch for reliable operation
- Heating element warms the air before it enters the bathing well through the perimeter channel
- 20 minutes after the bath is turned off the motor automatically blows any remaining residue out of the "Quick Drain" air channel
- Limited One-Year Warranty
- Available in Standard Colors: white, almond, biscuit and bone



Model 6715 (Shown with metal air switch and Lift and Turn drain)

Options -

Lift and Turn Drain

PF1320	Polished Chrome	all all	PF2335	Polished Chrome	
PF1321	Everbrass (PVD)		PF2336	Everbrass (PVD)	
PF1322	Brushed Nickel		PF2337	Brushed Nickel	
PF1323	Oil Rubbed Bronze		PF2338	Oil Rubbed Bronze	

On/off air switch



Printed in U.S.A. 12/12 © 2012 Mansfield Plumbing Products, LLC

Mansfield Plumbing Products LLC • Customer Service Toll Free 877-850-3060 • Fax 419-938-6234 Website: www.mansfieldplumbing.com • Email: custserv@mansfieldplumbing.com




Specifications

Model #	Description	Codes/Standards		
6715	60" x 42" x 20-1/4" Oval Air Massage Bath			

Specification	Description	Specification	Description
Material	Acrylic, fiberglass reinforced	Number of Jets	47
Construction	Self-contained, pre-plumbed air massage bath, mounted on a pre-leveled base	Water Capacity	42 gal. (min.) / 55 gal. (max.)
Blower Motor	120V, 60HZ, 6.0 Amp, Single Speed blower, 200 Watt Heater, Single Phase–Pre-mount- ed	Floor Loading Weight	47 lbs. / sq. ft. (229 kg/m ²)
Electrical Requirements	120V, 15 Amp, GFCI protected	Shipping Weight	148 lbs. (67 kg)
On/Off Control	Air Switch	Warranty	Limited One Year

Technical Information

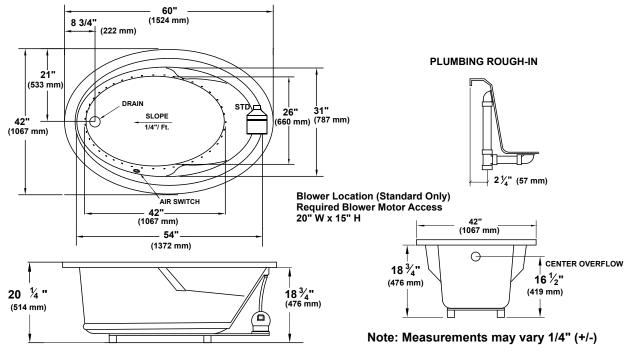

Optional Removable Apron not available on this unit.

Installer note: Due to the free-form shape of this tub, it is recommended that the tub be on the jobsite before making the final cut out for drop-in installation.

These dimensions are nominal and subject to change without notice.

When tested for compliance to the requirements of ASME A112.19.7M for "Whirlpool Bath Appliances" and ANSI Z124.1.2M "American National Standard for Plastic Bathtub and Shower Units", the tested units are found to comply and are acceptable for listing under IAPMO R & T.

Certified for permanent electrical connection only.

MADE IN USA

Printed in U.S.A. 12/12 © 2012 Mansfield Plumbing Products, LLC

[®] Pro-fit is a registered trademark of Mansfield Plumbing Products, LLC. Mansfield Plumbing Products LLC • Customer Service Toll Free 877-850-3060 • Fax 419-938-6234 Website: www.mansfieldplumbing.com • Email: custserv@mansfieldplumbing.com