

GENERAL

Highest quality sink bowl seamlessly formed of #18 (1.2mm) gauge, type 304 (18-8) nickel bearing stainless steel. Top Mount. **OTHER**

DRKAD(Q)2517, DRKAD(Q)2220, DRKAD(Q)2522 and

DRKAD(Q)3119 drain opening is 3-1/2" (89mm) and located centered left-to-right and off-center front-to-back as illustrated. All other drain opening sizes are 3-1/2" (89mm) and centered in bowl as illustrated.

Slotted hole allows for vandal-resistant faucet and bubbler.

Sink complies with ASME A112.19.3/ CSA B45.4



Sinks are listed by IAPMO[®] as meeting the applicable requirements of the Uniform Plumbing Code[®], International Plumbing Code[®], and National Plumbing Code of Canada.




Both the faucet and the bubbler are classified by Underwriters Laboratories Inc. to NSF/ANSI61 for residential use.



All sinks 6-1/2" or less in depth are compliant to ADA and ANSI/ICC A117.1 accessibility requirements when installed

according to the requirements outlined in these standards.











LK1141A




LK35

U-Channel Type Mounting System





Quick-Clip[®] Mounting system



SEE NEXT PAGE FOR PRODUCT DIMENSIONS.

In keeping with our policy of continuing product improvement, Elkay reserves the right to change product specifications without notice. Please visit elkay.com for the most current version of Elkay product specification sheets.

This specification describes an Elkay product with design, quality, and functional benefits to the user. When making a comparison of others producers offerings, be certain these featrues are not overlooked.

2222 Camden Court Oak Brook, IL 60523




SINK DIMENSIONS*


U-Channel Model Number	Quick-Clip [®] Model Number	Overall		Inside Bowl			Cutout in Counterop [11/2"] (38mm)		No. of Faucet Holes (see back	31/2" (59mm) Drain Opening (see above	Minimum Cabinet
		L A	<u> </u>	L C	 D	D	Radius (Corners] W	page)	for details)	Size
DRKR2220C	DRKRQ2220C	22 (559mm)	19½	13½	16 (406mm)	7½	21¾ (543mm)	187⁄8 (479mm)	4	Centered	27 (686mm)
† DRKR2220	† DRKRQ2220	22 (559mm)	19½ (495mm)	13½ (343mm)	16 (406mm)	7½ (191mm)	21¾ (543mm)	18% (479mm)	2, 2LM, 4 FR2, 2FRM, FR4	Centered	27 (686mm)
DRKR2517C	DRKRQ2517C	25 (635mm)	17 (432mm)	16 (406mm)	13½ (343mm)	75% (194mm)	24¾ (619mm)	16¾ (416mm)	4	Centered	30 (762mm)
† DRKR2517	† DRKRQ2517	25 (635mm)	17 (432mm)	16 (406mm)	13½ (343mm)	75⁄8 (194mm)	24% (619mm)	16¾ (416mm)	2, 2LM, 4 FR2, 2FRM, FR4	Centered	30 (762mm)
† DRKR2522	† DRKRQ2522	25 (635mm)	22 (559mm)	16 (406mm)	19 (483mm)	7% (194mm)	24¾ (619mm)	21¾ (543mm)	2, 2LM, 4 FR2, 2FRM, FR4	Centered	30 (762mm)
DRKR3119C	DRKRQ3119C	31 (787mm)	19½ (495mm)	16 (406mm)	19 (483mm)	7% (194mm)	30¾ (772mm)	18 ⁷ ⁄8 (479mm)	4	Centered	36 (914mm)
† DRKR3119	† DRKRQ3119	31 (787mm)	19½ (495mm)	22 (559mm)	16 (406mm)	7% (194mm)	30¾ (772mm)	18% (479mm)	2, 2LM, 4 FR2, 2FRM, FR4	Centered	36 (914mm)
DRKAD2220C	DRKADQ2220C	22 (559mm)	19½ (495mm)	13½ (343mm)	16 (406mm)	**	21¾ (543mm)	18% (479mm)	4	Off-Centered	27 (686mm)
† DRKAD2220	† DRKADQ2220	22 (559mm)	19½ (495mm)	13½ (343mm)	16 (406mm)	**	21¾ (543mm)	18% (479mm)	2, 2LM, 4 FR2, 2FRM, FR4	Off-Centered	27 (686mm)
DRKAD2517C	DRKADQ2517C	25 (635mm)	17 (432mm)	16 (406mm)	13½ (343mm)	**	24¾ (619mm)	16¾ (416mm)	4	Off-Centered	30 (762mm)
† DRKAD2517	† DRKADQ2517	25 (635mm)	17 (432mm)	16 (406mm)	13½ (343mm)	**	24¾ (619mm)	16¾ (416mm)	2, 2LM, 4 FR2, 2FRM, FR4	Off-Centered	30 (762mm)
† DRKAD2522	† DRKADQ2522	25 (635mm)	22 (559mm)	16 (406mm)	19 (483mm)	**	24¾ (619mm)	21¾ (543mm)	2, 2LM, 4 FR2, 2FRM, FR4	Off-Centered	30 (762mm)
DRKAD3119C	DRKADQ3119C	31 (787mm)	19½ (495mm)	22 (559mm)	16 (406mm)	**	30¾ (772mm)	18 ⁷ ⁄8 (479mm)	4	Off-Centered	36 (914mm)
† DRKAD3119	† DRKADQ3119	31 (787mm)	19½ (495mm)	22 (559mm)	16 (406mm)	**	30¾ (772mm)	18 ⁷ ⁄8 (479mm)	2, 2LM, 4 FR2, 2FRM, FR4	Off-Centered	36 (914mm)

* Length is left to right. Width is front to back.


† Unless otherwise specified, all sinks which do not have suffix "C" are less fittings (no faucet, bubbler or drain), but are drilled for faucet, bubbler and drain as illustrated.


** Available in 4" (102mm), 4-1/2" (114mm), 5" (127mm), 5-1/2" (140mm), 6" (152mm) or 6-1/2" (165mm) depths. Please consult your sales representative for other depths or modifications.





DRKAD(Q) Series Off-Centered Drain






DRKR(Q) and DRKAD(Q) Series Centered Drain



Lustertone[®] Single Bowl Classroom Sinks and Sink Packages – Double Ledge Models DRKR and DRKRQ Series Models DRKAD and DRKADQ Series – A.D.A. Compliant

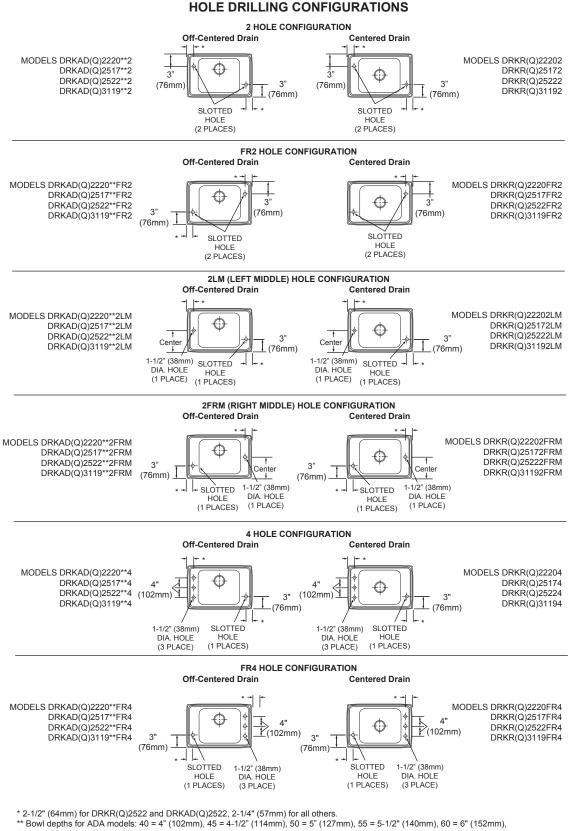

65 = 6-1/2" (165mm).