
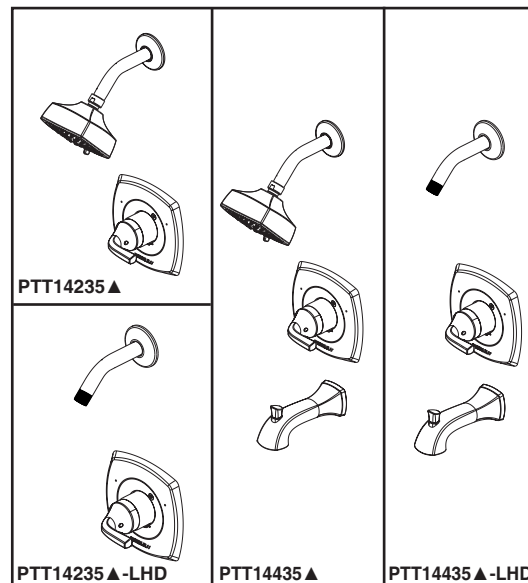


# PEERLESS®

PTT14235▲  
PTT14435▲  
PTT14235▲-LHD  
PTT14435▲-LHD

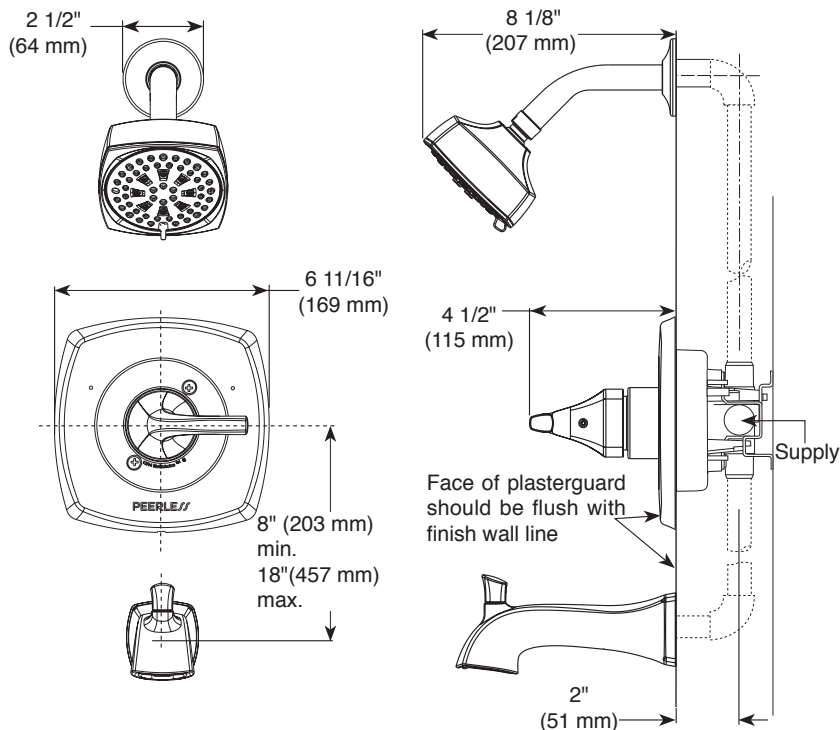

## TUB AND SHOWER FAUCET TRIM

- Parkwood™ Collection
- Shower Only  
(PTT14235▲ & PTT14235▲-LHD)
- Tub/Shower  
(PTT14435▲ & PTT14435▲-LHD)


## STANDARD SPECIFICATIONS:

- Maintains a balanced pressure of hot and cold water even when a valve is turned on or off elsewhere in the system.
- For use with MultiChoice® Universal rough valve body (R10000 Series); not included.
- Back-to-back installation capability.
- Temperature only controlled with handle rotating a maximum of 120° from full cold to the full hot.
- Cartridge utilizes integral check valve to prevent the cross flow of water within the valve.
- Shower head maximum flow rate 1.5 gpm @ 80 psi, 5.7 L/min @ 550 kPa.
- Easy-turn 6-spray setting shower head.
- Slip-on tub spout.


## WARRANTY:

- Parts and Finish - Lifetime limited warranty; or for commercial purchasers, 10 years for multi-family residential (apartments and condominiums) and 5 years for all other commercial uses, in each case from the date of purchase.

### RP100987▲ 1.5 GPM



### RP100986▲

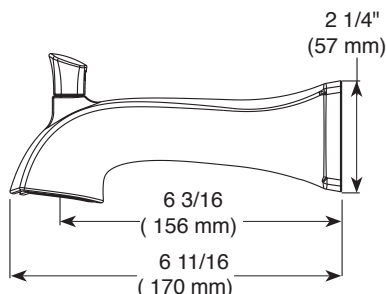

## Spray Pattern



Full Body  
Spray



Massage  
Spray



Shampoo  
Rinse Spray



Full Spray  
w/ Massage



Shampoo Rinse  
w/ Full Spray



Pause

▲ Designate proper finish suffix

PSP-B-PTT14435 Rev. A



## COMPLIES WITH

- ASME A112.18.1 / CSA B125.1
- EPA WaterSense® (Applies to PTT14235, PTT14435 & RP100987 only)



Indicates compliance to  
ICC/ANSI A117.1 - Valve control only